

11-13-00

A

11/10/00

JC966 U.S. PTO

**UTILITY PATENT APPLICATION TRANSMITTAL**  
**(Large Entity)***(Only for new nonprovisional applications under 37 CFR 1.53(b))*Docket No.  
14059

Total Pages in this Submission

**TO THE ASSISTANT COMMISSIONER FOR PATENTS**Box Patent Application  
Washington, D.C. 20231

Transmitted herewith for filing under 35 U.S.C. 111(a) and 37 C.F.R. 1.53(b) is a new utility patent application for an invention entitled:

**METHOD AND RELAY STATION FOR CALLBACK COMMUNICATION**

and invented by:

**Chiaki Igarashi**JC813 U.S. PTO  
09/710267

11/10/00

If a **CONTINUATION APPLICATION**, check appropriate box and supply the requisite information:☐ Continuation ☐ Divisional ☐ Continuation-in-part (CIP) of prior application No.: \_\_\_\_\_

Which is a:

☐ Continuation ☐ Divisional ☐ Continuation-in-part (CIP) of prior application No.: \_\_\_\_\_

Which is a:

☐ Continuation ☐ Divisional ☐ Continuation-in-part (CIP) of prior application No.: \_\_\_\_\_

Enclosed are:

**Application Elements**

1. ☒ Filing fee as calculated and transmitted as described below
2. ☒ Specification having 19 pages and including the following:
  - a. ☒ Descriptive Title of the Invention
  - b. ☐ Cross References to Related Applications *(if applicable)*
  - c. ☐ Statement Regarding Federally-sponsored Research/Development *(if applicable)*
  - d. ☐ Reference to Microfiche Appendix *(if applicable)*
  - e. ☒ Background of the Invention
  - f. ☒ Brief Summary of the Invention
  - g. ☒ Brief Description of the Drawings *(if drawings filed)*
  - h. ☒ Detailed Description
  - i. ☒ Claim(s) as Classified Below
  - j. ☒ Abstract of the Disclosure

**UTILITY PATENT APPLICATION TRANSMITTAL**  
**(Large Entity)**

*(Only for new nonprovisional applications under 37 CFR 1.53(b))*

Docket No.

14059

Total Pages in this Submission

**Application Elements (Continued)**

3. ☒ Drawing(s) *(when necessary as prescribed by 35 USC 113)*
- a. ☒ Formal                      Number of Sheets 10
- b. ☐ Informal                      Number of Sheets \_\_\_\_\_
4. ☒ Oath or Declaration
- a. ☐ Newly executed *(original or copy)*                      ☐ Unexecuted
- b. ☐ Copy from a prior application (37 CFR 1.63(d)) *(for continuation/divisional application only)*
- c. ☒ With Power of Attorney                      ☐ Without Power of Attorney
- d. ☐ DELETION OF INVENTOR(S)  
Signed statement attached deleting inventor(s) named in the prior application,  
see 37 C.F.R. 1.63(d)(2) and 1.33(b).
5. ☐ Incorporation By Reference *(usable if Box 4b is checked)*  
The entire disclosure of the prior application, from which a copy of the oath or declaration is supplied  
under Box 4b, is considered as being part of the disclosure of the accompanying application and is hereby  
incorporated by reference therein.
6. ☐ Computer Program in Microfiche *(Appendix)*
7. ☐ Nucleotide and/or Amino Acid Sequence Submission *(if applicable, all must be included)*
- a. ☐ Paper Copy
- b. ☐ Computer Readable Copy *(identical to computer copy)*
- c. ☐ Statement Verifying Identical Paper and Computer Readable Copy

**Accompanying Application Parts**

8. ☒ Assignment Papers *(cover sheet & document(s))*
9. ☐ 37 CFR 3.73(B) Statement *(when there is an assignee)*
10. ☐ English Translation Document *(if applicable)*
11. ☐ Information Disclosure Statement/PTO-1449                      ☐ Copies of IDS Citations
12. ☐ Preliminary Amendment
13. ☒ Acknowledgment postcard
14. ☒ Certificate of Mailing
- ☐ First Class                      ☒ Express Mail *(Specify Label No.):* EL658969191US

**UTILITY PATENT APPLICATION TRANSMITTAL**  
**(Large Entity)**

*(Only for new nonprovisional applications under 37 CFR 1.53(b))*

Docket No.  
14059

Total Pages in this Submission

**Accompanying Application Parts (Continued)**

15. ☐ Certified Copy of Priority Document(s) *(if foreign priority is claimed)*

16. ☒ Additional Enclosures *(please identify below):*

Claim of Priority in due course

**Request That Application Not Be Published Pursuant To 35 U.S.C. 122(b)(2)**

17. ☐ Pursuant to 35 U.S.C. 122(b)(2), Applicant hereby requests that this patent application not be published pursuant to 35 U.S.C. 122(b)(1). Applicant hereby certifies that the invention disclosed in this application has not and will not be the subject of an application filed in another country, or under a multilateral international agreement, that requires publication of applications 18 months after filing of the application.

**Warning**

***An applicant who makes a request not to publish, but who subsequently files in a foreign country or under a multilateral international agreement specified in 35 U.S.C. 122(b)(2)(B)(i), must notify the Director of such filing not later than 45 days after the date of the filing of such foreign or international application. A failure of the applicant to provide such notice within the prescribed period shall result in the application being regarded as abandoned, unless it is shown to the satisfaction of the Director that the delay in submitting the notice was unintentional.***

**UTILITY PATENT APPLICATION TRANSMITTAL**  
**(Large Entity)**

*(Only for new nonprovisional applications under 37 CFR 1.53(b))*

Docket No.  
**14059**

Total Pages in this Submission

**Fee Calculation and Transmittal**

**CLAIMS AS FILED**

For	#Filed	#Allowed	#Extra	Rate	Fee
Total Claims	14	- 20 =	0	x \$18.00	\$0.00
Indep. Claims	2	- 3 =	0	x \$80.00	\$0.00
Multiple Dependent Claims (check if applicable) <input type="checkbox"/>					\$0.00
BASIC FEE					\$710.00
OTHER FEE (specify purpose) _____					\$0.00
TOTAL FILING FEE					\$710.00

- ☒ A check in the amount of \$710.00 to cover the filing fee is enclosed.
- ☒ The Commissioner is hereby authorized to charge and credit Deposit Account No. 19-1013/SSMP as described below. A duplicate copy of this sheet is enclosed.
- ☐ Charge the amount of \_\_\_\_\_ as filing fee.
- ☒ Credit any overpayment.
- ☒ Charge any additional filing fees required under 37 C.F.R. 1.16 and 1.17.
- ☐ Charge the issue fee set in 37 C.F.R. 1.18 at the mailing of the Notice of Allowance, pursuant to 37 C.F.R. 1.311(b).

  
Signature

Paul J. Esatto, Jr.  
Registration No. 30,749

Scully, Scott, Murphy & Presser  
400 Garden City Plaza  
Garden City, NY 11530  
(516) 742-4343

Dated: November 10, 2000

cc:

**CERTIFICATE OF MAILING BY "EXPRESS MAIL" (37 CFR 1.10)**Applicant(s): **Chiaki Igarashi**

Docket No.

**14059**

Serial No.

**Unassigned**

Filing Date

**Herewith**

Examiner

**Unassigned**

Group Art Unit

**Unassigned**Invention: **METHOD AND RELAY STATION FOR CALLBACK COMMUNICATION**

I hereby certify that the following correspondence:

**New Patent Application***(Identify type of correspondence)*

is being deposited with the United States Postal Service "Express Mail Post Office to Addressee" service under 37 CFR 1.10 in an envelope addressed to: The Assistant Commissioner for Patents, Washington, D.C. 20231

**November 10, 2000***(Date)***Mishelle Mustafa***(Typed or Printed Name of Person Mailing Correspondence)**(Signature of Person Mailing Correspondence)***EL658969191US***("Express Mail" Mailing Label Number)***Note: Each paper must have its own certificate of mailing.**JC813 U.S. PTO  
09/7/0267

11/10/00

## METHOD AND RELAY STATION FOR CALLBACK COMMUNICATION

### Background of the Invention:

#### 1. Field of the invention

The present invention relates to a callback mechanism between two telecommunication terminals one of which is a wireless telephone and, more particularly, to data communication between a data server in a local area network and a wireless telephone which can not autonomously accept a call for establishing callback connection.

#### 2. Description of the related art

There is a system for callback communication between a wireless telephone and a data server. The wireless telephone, which is provided as terminal equipment of digital cordless telecommunication system, PDC (personal digital cellular telecommunication system) or the like, sends a request for data to the data server. The data server calls the wireless telephone to send the requested data to the wireless telephone. In order to receive the data, the wireless telephone should accept the call autonomously.

For example, there is a PBX (private branch exchange) system to which PHS (personal handy phone system) is applied. In the PBX system, a TA (terminal adapter) is installed at an output point (T point) of a DSU (digital service unit) connected with ISDN (integrated services digital network). At output R points of the TA, a base station and other data terminals are connected with the TA. The base station is connected with terminals by a wireless path or channel. With this structure, the terminals are put into a

state of accepting callback from the base station autonomously.

General wireless telephones, however, are not always installed with a function for accepting callback. If a wireless telephone without such a function is used as a terminal of the above-mentioned PBX system, the wireless telephone cannot accept callback from the data server.

Moreover, when the terminal is not given an identifier for specifying each of the terminals connected with the base station, the base station cannot select one of the terminals for sending callback so that the terminal can not receive the callback, even if the terminal is available for callback.

Description will be made about a callback communication procedure of a practical wireless PBX system whose terminals are not given their identifiers with reference to Fig. 1. The system comprises a data server, a base station and plural wireless terminals. First, one of the terminals sends a request for callback to the base station by wireless path (STEP 1). Next, the base station sends the request to the data server by a wired line (STEP 2). The request of STEP 2 includes a telephone number of the base station, but does not include the identifier of the terminal. Consequently, even if the data server sends callback back to the base station (STEP 3), the base station cannot relay the callback to the terminal.

#### Summary of the Invention:

Thus, in order to accept and respond to callback by a wireless terminal, a function for accepting callback should be incorporated in the wireless terminal. Namely, conventional callback communication between a wireless terminal and a data server requires a wireless terminal comprising a function for callback but such functions may not be always incorporated into all of common wireless terminals.

When the user of the wireless terminal does not know that his or her terminal is unavailable for callback, he or her might try callback communication repeatedly. As a result, the lines of the data server and wireless paths between the base station and the wireless terminals would be busy frequently.

Moreover, the conventional base station must secure wireless line for the wireless terminal requesting callback, so that base station must execute complex connection control between the public telecommunication network and the wireless terminals.

It is an object of this invention to provide a method, system and base station for callback communication requested by a terminal without a function for replying to callback.

It is another object of this invention to provide the method, system and base station, wherein wireless paths are undesirably frequently kept busy between the base station and the terminal or the data server.

It is still another object of this invention to provide the method, system and base station, wherein connection control by the base station is simplified.

According to the present invention, a method is for use in establishing callback communication between first and second terminals via a relay station. In the method, the first terminal sends a callback request for establishing the callback communication to the second terminal. The method comprises the steps of: (1) establishing first connection between the first terminal and the relay station; (2) sending the callback request from the first terminal to the relay station; (3) establishing second connection between the second terminal and the relay station with the first connection being kept established in response to a request from the second terminal; and (4) linking the first connection with the second connection in order to establish the callback communication between the first and second terminals.



The relay station may comprise wireless and wired communication interfaces. In this case, the wireless communication interface is connected with at least one of the first and second terminals.

The step (3) may comprise the steps of: establishing the second connection requested by the relay station; sending the callback request from the relay station to the second terminal; canceling the second connection; and establishing the second connection requested by the second terminal. In this case, both the relay station and the second terminal may request the step of canceling

When the relay station comprises wireless and wired communication interfaces and the wireless communication interface is connected with at least one of the first and second terminals, the first terminal may be connected with the relay station via the wireless communication interface and the second terminal may be connected with the relay station via the public telecommunication network. Alternatively, the first terminal may be connected with the relay station via the public telecommunication network and the second terminal may be connected with the relay station via the wireless communication interface.

Furthermore, according to the present invention, a relay station is for use in establishing callback communication between first and second terminals, the first terminal sending a callback request for establishing the callback communication to the second terminal. The relay station comprises: first interface for establishing first connection with the first terminal and receiving the callback request from the first terminal; second interface for establishing second connection with the second terminal with the first connection being kept established in response to a request from the second terminal; and means for linking the first connection with the second connection in order to establish the callback communication between the

first and second terminals.

The relay station may comprise wireless and wired communication interface and the wireless communication interface may be connected with at least one of the first and second terminals.

The second interface may comprise means for canceling the second connection from sending the callback request to the second terminal to receiving a request for reestablishing the second connection from the second terminal. In this case, the means for canceling may cancel the second connection without waiting for a request from the second terminal. Alternatively, the means for canceling may cancel the second connection in response to a request from the second terminal.

When the relay station comprises wireless and wired communication interface and the wireless communication interface is connected with at least one of the first and second terminals, the first terminal may be connected with the relay station via the wireless communication interface and the second terminal may be connected with the relay station via the public telecommunication network. Alternatively, the first terminal may be connected with the relay station via the public telecommunication network and the second terminal may be connected with the relay station via the wireless communication interface.

#### Brief Description of the Drawing:

Fig. 1 shows a sequence of conventional callback communication between a data server and a wireless terminal via a base station.

Fig. 2 shows a block diagram of a callback communication system 100 of the present invention.

Fig. 3 shows a block diagram of the base station 13.

Fig. 4 shows a callback communication sequence of the system shown in Fig. 3.

Fig. 5 shows a callback communication sequence of the system shown in Fig. 3.

Fig. 6 shows a callback communication sequence of the system shown in Fig. 3.

Fig. 7 shows a callback communication sequence of the system shown in Fig. 3.

Fig. 8 shows a callback communication sequence of the system shown in Fig. 3.

Fig. 9 shows a block diagram of a callback communication system of the present invention.

Fig. 10 shows a block diagram of a callback communication system of the present invention.

#### Description of the Preferred Embodiments:

Description will be made about a callback communication system 100 with reference to Fig. 2. In the system 100, a PHS (personal handy phone system) private branch exchange system 1 (hereinafter referred to as "the PBX system 1") is connected with a data server 3 via an ISDN (integrated services digital network) 2.

The PBX system 1 comprises a DSU (digital service unit) 11, a TA (terminal adapter) 12, a wireless station 13 (may be called a base station), and a wireless terminal 14s. The DSU (digital service unit) 11 terminates subscriber's loops and the TA 12. The TA 12 converts communication protocols between the DSU 11 and the wireless station 13 in order to connect the wireless terminal 14s with ISDN 2. The wireless station 13 is connected with an output port (R point) of the TA 12 and corresponds to the

relay station in the claims of the present invention. The wireless terminal 14 is connected with the wireless station 13 via wireless path and corresponds to the first terminal of the present invention. Further, the illustrated wireless terminal 14 is assumed to be unavailable for accepting callback from other terminal.

One wireless terminal 14 is shown in Fig. 2, however, plural wireless terminal 14s are actually connected with the base station 13. The illustrated wireless terminal 14 may be assumed to be PHS telephone equipment having a display device for displaying character data received through callback communication or an interface for outputting character data to another displaying device.

The wireless terminal 14 is common in structure to one another. For example, the wireless terminal 14 comprises a wireless communication unit, an LCD (liquid crystal display), an input unit, a CODEC (coder-decoder), a microphone, a speaker, an LED (light emitting diode), a ringer, a vibrator and so forth. The wireless communication unit executes processes for setting frequency, modulation, demodulation, RSSI (receiving signal strength indication), TDMA (time division multiple access) and TDD (time division duplex) in order to establish wireless connection with a cell station of PHS (not shown in Fig. 2). The input unit comprises a power switch key, a ten key, a function switch key and so forth.

A PSTN (public switched telecommunications network) may be substituted for the ISDN 2. In this case, an NCU (network control unit) or a modem is used instead of the DSU 11.

The data server 3 is connected with the ISDN 2, receives a request for callback communication (hereinafter referred to as callback request) sent from the wireless terminal 14 and sends required data to the wireless terminal 14. For example, the data server 3 may comprise a LAN (local area

network) which includes a client/server system and is connected with the ISDN 2 via a DSU and a TA. In this example, when the server of the LAN accepts a callback request from the wireless terminal 14, the server sends a callback back to the wireless terminal 14 and, after establishing connection between the server and the wireless terminal 14, serves required data to the wireless terminal 14.

Turning to Fig. 3, the wireless station 13 comprises a receipt detector 22, a connection controller 23, a calling controller 24, a wireless connection controller 25, an antenna 26 and a sending controller 27. The receipt detector 22 detects receipt of a call via the ISDN 2. The connection controller 23 notifies the calling controller 24 that the receipt detector 22 detects a call. The wireless connection controller 25 controls calling to the wireless terminal 14 according to the calling controller 24. The calling controller 24 decides whether a call detected by the connection controller 23 is a callback sent from the data server 3 or not. The sending controller 27 sends a callback request to the data server 3 via the ISDN 2.

The PBX system 1 is connected with the data server 3 via the ISDN 2. For example, data transmission procedure through information channels (2B) + a control channel (D) or information channels (23B) + a control channel (D) of the ISDN 2 may be regulated in the user network interface standard I. 430 of the I series of ITU-T.

The connection between the wireless station 13 and the wireless terminal 14 may be established according to TDMA/TDD standardized in the RCR-STD-27F, a mobile assisted hand-over procedure and a roaming procedure. Further, the wireless station 13 and the wireless terminal 14 may repeatedly communicate with each other while processing is being executed to register position information of the wireless terminal 14 and to communicate via a control channel CCH or an information channel TCH.

Description will be made about four preferred working processes of the wireless station 13. Hereinafter, connection between the wireless station 13 and the wireless terminal 14 is referred to as first connection, and connection between the data server 3 and the wireless station 13 is referred to as second connection.

(1) When the first connection is established and then the wireless connection controller 25 receives a callback request from the wireless terminal 14, the calling controller 24 directs the connection controller 23 to establish callback connection with the data server 3 while the wireless connection controller 25 is keeping the first connection established. The connection controller 23 directs the sending controller 27 to establish second connection and to send callback request to the data server 3. After sending the callback request, the second connection is interrupted. Then, when the receipt detector 22 detects a call to the wireless station 13 via the ISDN 2, the connection controller 23 decides whether the call is sent from the data server 3 or not. If the call is sent from the data server 3, the receipt detector 22 accepts the call to establish the second connection again. After both the first and the second connections are established, the first and second connections are linked with each other in order to perform data communication between the data server 3 and the wireless terminal 14.

(2) The second connection is once interrupted after the sending controller 27 sends the callback request to the data server 3 in (1). In (2), the second connection is interrupted by the wireless station 13, namely by the connection controller 23.

(3) The second connection once interrupted in (1) is interrupted by the data server 3.

(4) Before the working processes (1), (2) or (3), the wireless station 13 receives a previous notice of sending callback request from the wireless

terminal 14. In this case, when the wireless connection controller 25 receives the previous notice from the wireless terminal 14, the first connection is once interrupted. Next, the calling controller 24 directs the connection controller 23 to send the previous notice to the data server 3. The connection controller 23 directs the sending controller 27 to establish the second connection in order to send the previous notice. After sending the previous notice from the sending controller 27 to the data server 3, the second connection is interrupted. In response to the previous notice, when the data server 3 is ready to accept callback request to the wireless terminal 13, the data server 3 send back a ready notice to the wireless station 13. When the receipt detector 22 detects a receipt of the ready notice, the calling controller 24 receives the ready notice via the connection controller 23 and directs the wireless connection controller 25 to send the ready notice to the wireless terminal 14.

Next, description will be made about four processes for establishing callback communication of the callback communication system 100. Following four processes (A), (B), (C) and (D) correspond to the working processes of the wireless station 13 (1), (2), (3) and (4) mentioned above in order.

(A) Turning to Fig. 4, first, the wireless terminal 14 establishes first connection and sends a callback request to the wireless station 13 (STEP 41). Next, the wireless station 13 sends the callback request to the data server 3 with the first connection being kept establishing (STEP 42, 43). Then, the second connection is once interrupted (STEP 44) and the data server 3 establishes the second connection again and sends callback to the wireless station 13 (STEP 45). After that, the wireless station 13 links the first connection with the second connection (STEP 46). Finally, data communication between the wireless terminal 14 and the data server 3 is

performed (STEP 47).

(B) Turning to Fig. 5, first, the wireless terminal 14 establishes first connection and sends a callback request to the wireless station 13 (STEP 51). Next, the wireless station 13 sends the callback request to the data server 3 with the first connection being kept established (STEP 52, 53). Then, the wireless station 13 interrupts the second connection (STEP 54). Next, the data server 3 establishes the second connection again and sends callback to the wireless station 13 (STEP 55). After that, the wireless station 13 links the first connection with the second connection (STEP 56). Finally, data communication between the wireless terminal 14 and the data server 3 is performed (STEP 57).

(C) Turning to Fig. 6, first, the wireless terminal 14 establishes first connection and sends a callback request to the wireless station 13 (STEP 61). Next, the wireless station 13 sends the callback request to the data server 3 with the first connection being kept established (STEP 62, 63). Then, the data server 3 once interrupts the second connection (STEP 64). Next, the data server 3 establishes the second connection again and sends callback to the wireless station 13 (STEP 65). After that, the wireless station 13 links the first connection with the second connection (STEP 66). Finally, data communication between the wireless terminal 14 and the data server 3 is performed (STEP 67).

(D) This process (D) precedes the processes (A), (B) or (C). Turning to Fig. 7, first, the wireless terminal 14 sends to the wireless station 13 a previous notice which announces that the wireless terminal 14 is planning to send a callback request to the data server 3 near the future (STEP 71). Next, the first connection is interrupted (STEP 72). Then, the wireless station 13 sends the previous notice to the data server 3 (STEP 73). Next, the second connection is interrupted (STEP 74). Then, the data server 3



send to the wireless station 13 a ready notice which announces that the data server 3 has been ready for accepting a callback request (STEP S75). After that, one of the processes (A), (B) and (C) follows.

According to the callback communication system 100 mentioned above, the wireless terminal 14 can perform data communication with the data server 3 via the ISDN 2. In this system, the wireless terminal 14 may not comprise a device for accepting callback from the data server 3. Further, even if the wireless station 13 manages plural wireless terminals, the wireless station 13 does not have to identify these terminals each other to send callback to the wireless station having requested the callback.

Furthermore, according to the system 100, connection control sequence of wireless station is simplified. In conventional connection control sequence, both the first and second connections are interrupted after a wireless terminal sends a callback request to a data server. In the embodiment of the present invention, however, the first connection is continuously established during a time from sending a callback request to establishing connection between the wireless terminal 14 and the data server 3.

In above-mentioned processes (A), (B), (C) and (D), callback communication is requested by the wireless terminal 14. On the other hand, callback communication may be requested by the data server 3. Following description is made about a process reverse to the process (A) with reference to Fig. 2, 3 and 8.

The data server 3 sends a callback request to the wireless station 13 via the ISDN 2 (STEP 81).

The receipt detector 22 detects a receipt of the callback request and tells the receipt to the connection controller 23. The connection controller 23 recognizes the receipt and requests the calling controller 27 to decide

whether the second connection is to be established or not. In response to the request, the calling controller 27 analyzes the receipt to distinguish a receipt of a callback request to the wireless terminal 14 from other receipts. If the receipt is distinguished as a receipt of a callback request, the calling controller 27 directs the wireless connection controller 25 to call the wireless terminal 14. The wireless connection controller 25 calls the wireless terminal 14 (STEP 82).

In response to the call from the wireless connection controller 25, the wireless terminal 14 establishes the first connection (STEP 83).

While the first connection is continuously kept established, the calling controller 27 directs the connection controller 23 to interrupt the second connection. The connection controller 23 interrupts the second connection (STEP 84). The calling controller 27 recognizes that the second connection is interrupted and then the calling controller 27 directs the connection controller 23 to call the data server 3. The connection controller 23 directs the sending controller 27 to call the data server 3. The sending controller 27 calls the data server 3 (STEP 85).

The data server 3 accepts the call and establishes the second connection again. The re-establishment of the second connection detected by the sending controller 27 is announced to the calling controller 24 via the connection controller 23. Then, the calling controller 27 links the first connection with the second connection (STEP 86). Consequently, data communication between the data server 3 and the wireless terminal 14 is performed (STEP 87).

If the wireless terminal 14 is busy at STEP 82, the wireless station 13 announces that and cancels the callback request. If the data server 3 is busy at STEP 85, the wireless station 13 interrupts the first connection and cancels the callback request.

The present invention is applicable for various communication systems. For example, the present invention is applied to the callback communication system 900 shown in Fig. 9. In the system 900, the base station 91 corresponds to the DSU 11, the TA 12 and the wireless station 13. The cordless telephone 92 corresponds to the wireless terminal 14. Both wireless and wired connections are available for connection between the public telecommunication network 93 and the base station 91.

Furthermore, the present invention is applicable not only to a relay station of a private branch exchange system, but also to an exchange of a switched network. For example, a micro cell station of PHS may correspond to the wireless station 13. In this case, mobile assisted hand off between adjacent micro cells or roaming between two PHS communication networks allows callback communication through wide area to be performed.

The present invention is also applicable to the callback communication system 1000 as shown in Fig. 10. The system 1000 is based on PDC and TDMA (time division multiple access). The mobile communication control station 101 manages plural cell station 102s. In this case, the wireless station 13 is incorporated into the cell station 102.

Moreover, above-mentioned processes are applicable to a callback communication system whose relay station and terminal are connected with each other via wired line. In the system, a relay station and terminals that are connected with each other via wired line are substitutive for the wireless station 13 and the wireless terminal 14s. In this case, the terminal may not be incorporated with a unit for accepting callback autonomously.

Moreover, the present invention is also applicable to communication systems based on TCP/IP, PIAFS (PHS internet access forum standard), the Internet, intranet or extranet.

The present invention is independent on type of multiple access of applied communication system. For example, PHS-TDMA/TDD, PDC-TDMA, CDMA (code division multiple access) or FDMA (frequency division multiple access) are available for multiple access of the communication system.

As mentioned above, the present invention can provide a method and a relay station for callback communication whose terminal may not be incorporated with a device for accepting callback from the data server. Because connection between the relay station and the terminal is being kept established from sending a callback request until establishing connection between the terminal and the data server.

Moreover, according to the present invention, requested callback is established in higher probability than that of the conventional. Because connection between the relay station and the terminal is secured until requested callback is sent back to the relay station.

And moreover, according to the present invention, connection control procedure by the relay station becomes very simple. This is because the conventional relay station has to reserve a path for the terminal requesting callback.

While this invention has thus far been described in conjunction with a few embodiments thereof, it will be readily possible for those skilled in the art to put the this invention into various other manners.

## WHAT IS CLAIMED IS:

1. A method of establishing callback communication between first and second terminals via a relay station, the first terminal sending a callback request for establishing the callback communication to the second terminal, comprising the steps of:

(1) establishing first connection between the first terminal and the relay station;

(2) sending the callback request from the first terminal to the relay station;

(3) establishing second connection between the second terminal and the relay station with the first connection being kept established in response to a request from the second terminal; and

(4) linking the first connection with the second connection in order to establish the callback communication between the first and second terminals.

2. The method claimed in claim 1, wherein:

the relay station comprises wireless and wired communication interfaces; and

the wireless communication interface is connected with at least one of the first and second terminals.

3. The method claimed in claim 1, the step (3) comprising the steps of:  
establishing the second connection requested by the relay station;  
sending the callback request from the relay station to the second terminal;

canceling the second connection; and

establishing the second connection requested by the second terminal.

4. The method claimed in claim 3, wherein the step of canceling is requested by the relay station.

10. The relay station claimed in claim 8, the second interface comprising means for canceling the second connection from sending the

callback request to the second terminal to receiving a request for reestablishing the second connection from the second terminal.

11. The relay station claimed in claim 10, wherein the means for canceling cancels the second connection without waiting for a request from the second terminal.

12. The relay station claimed in claim 10, wherein the means for canceling cancels the second connection in response to a request from the second terminal.

13. The relay station claimed in claim 9, the first terminal being connected with the relay station via the wireless communication interface, the second terminal being connected with the relay station via the public telecommunication network.

14. The relay station claimed in claim 9, the first terminal being connected with the relay station via the public telecommunication network, the second terminal being connected with the relay station via the wireless communication interface.

Abstract of the Disclosure:

In a method of establishing callback communication between first and second terminals via a relay station, the first terminal sends a callback request for establishing the callback communication to the second terminal. The method comprises the steps of: (1) establishing first connection between the first terminal and the relay station; (2) sending the callback request from the first terminal to the relay station; (3) establishing second connection between the second terminal and the relay station with the first connection being kept established in response to a request from the second terminal; and (4) linking the first connection with the second connection in order to establish the callback communication between the first and second terminals. Further, a relay station performing the method is also provided. This method dispenses with any identifier for identifying the first terminal on performing the callback.



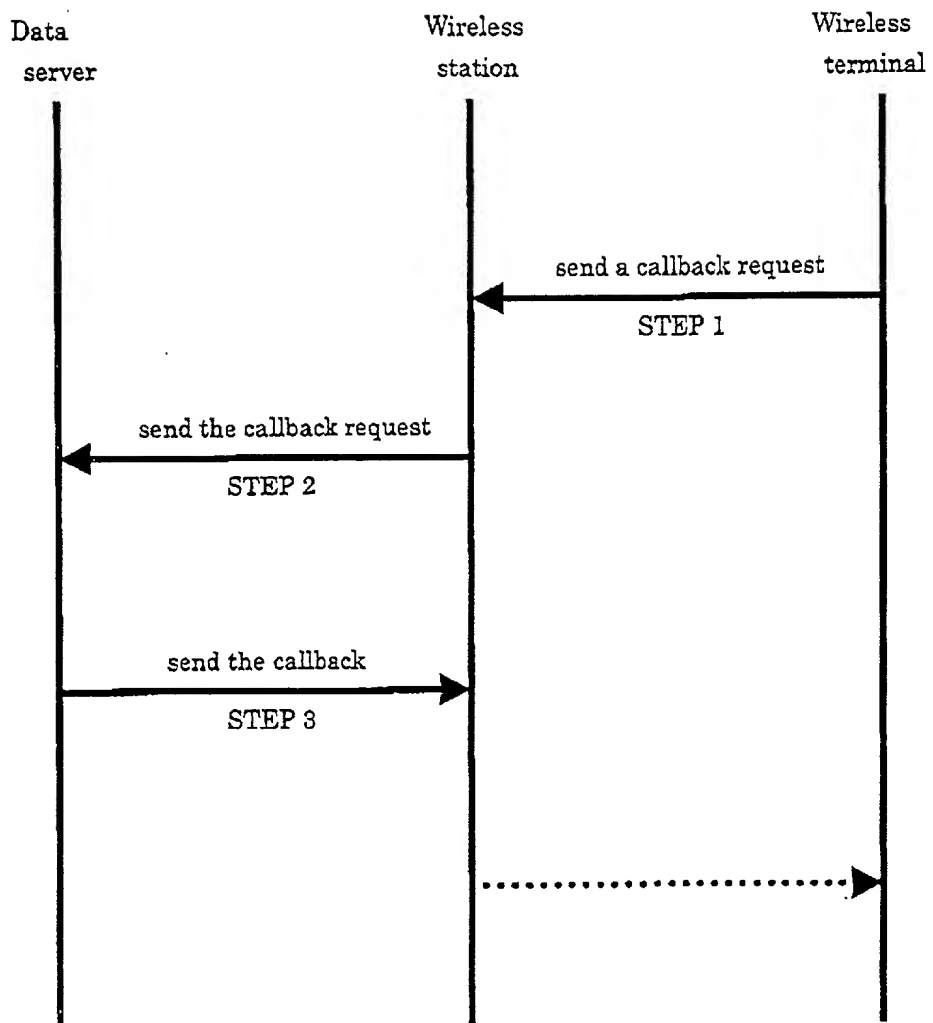


Fig. 1

*Related Art*

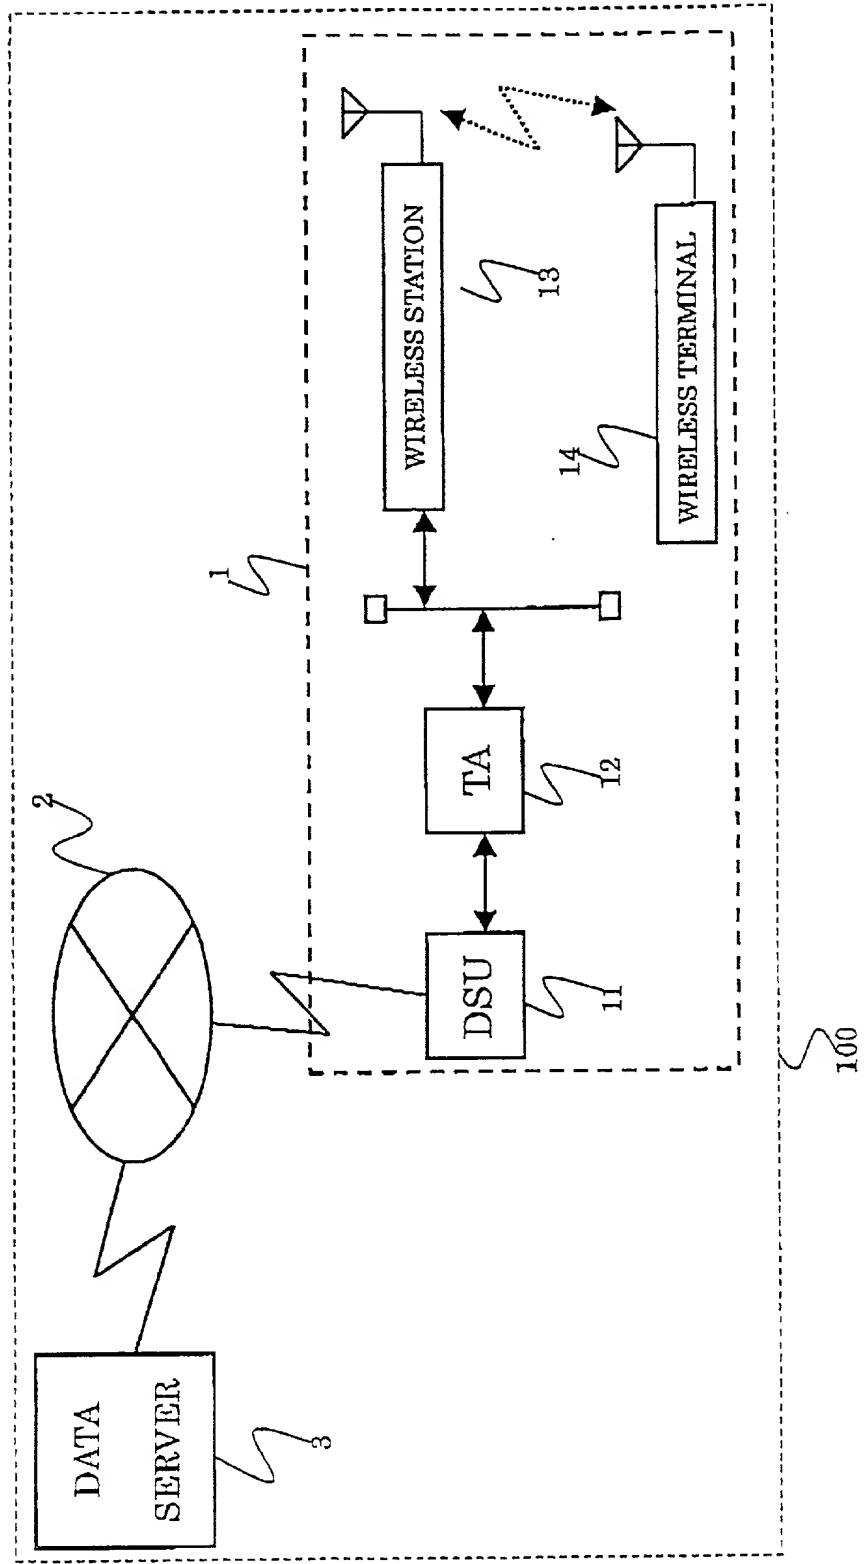


Fig. 2

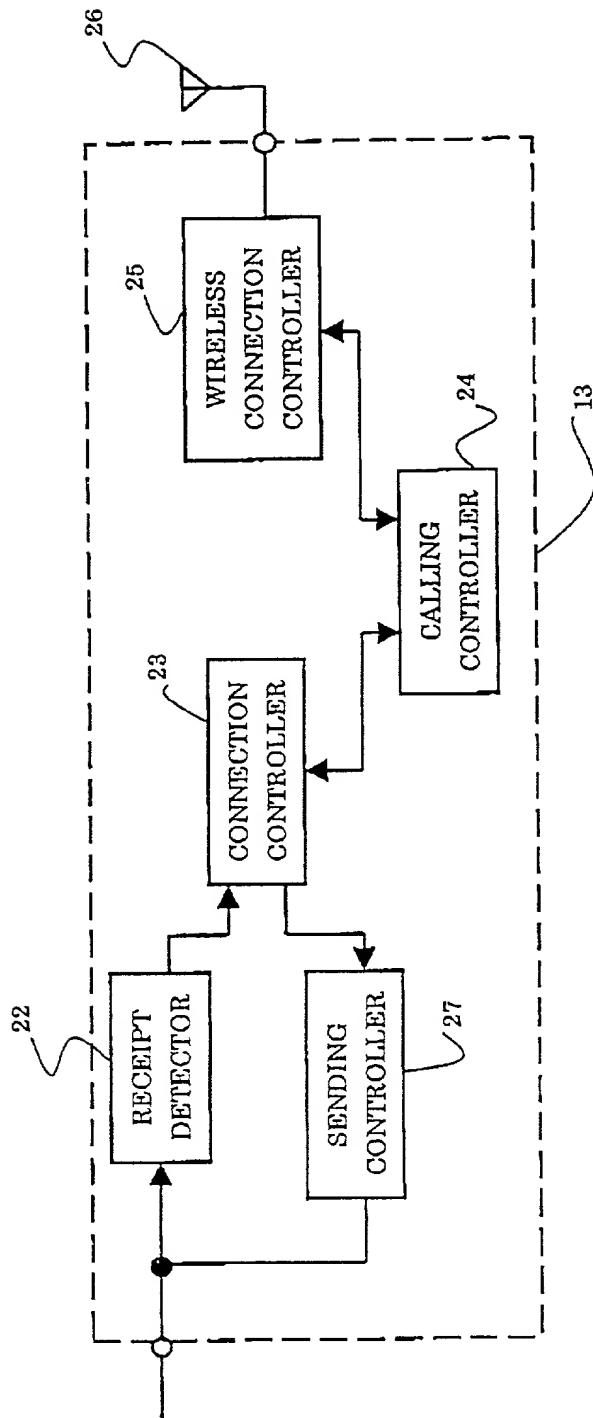


Fig. 3

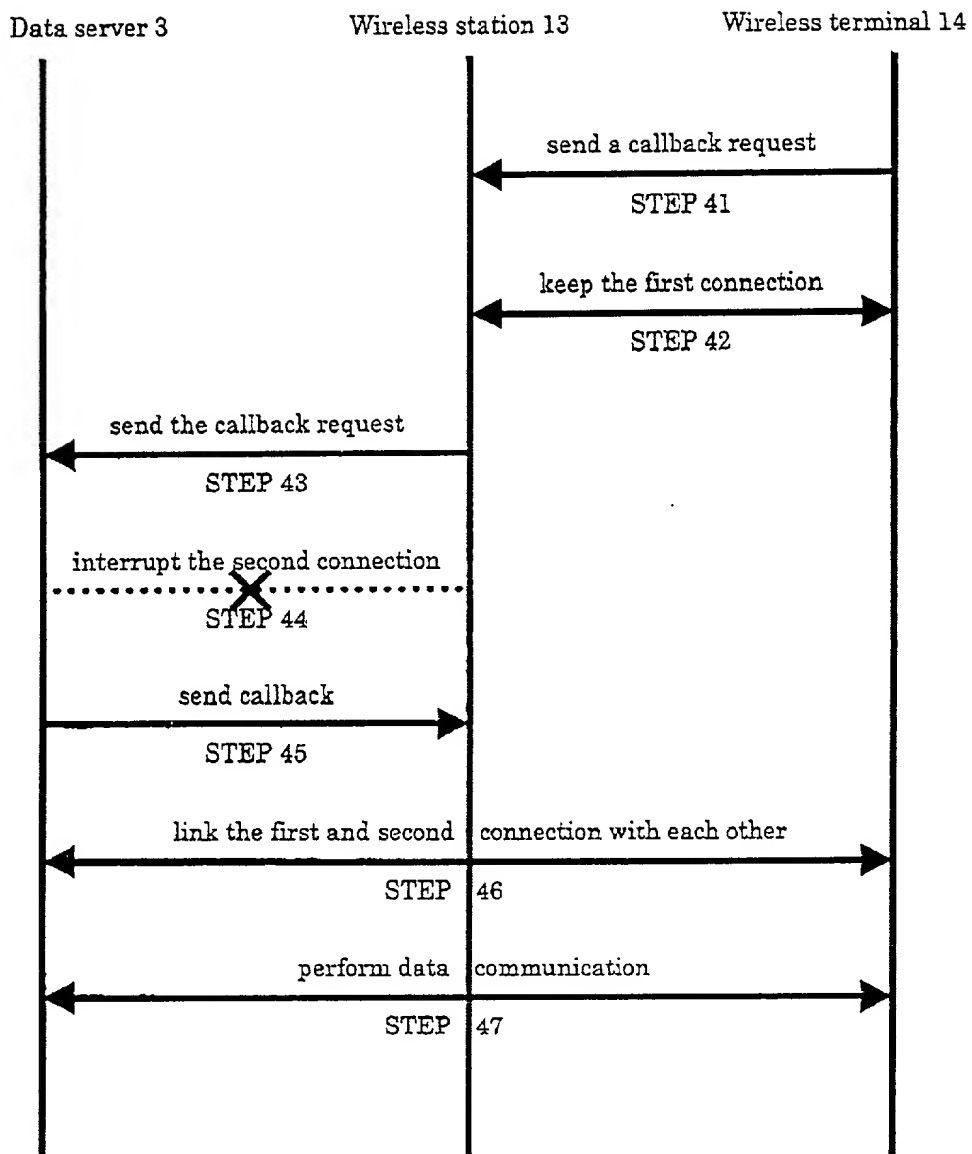


Fig. 4

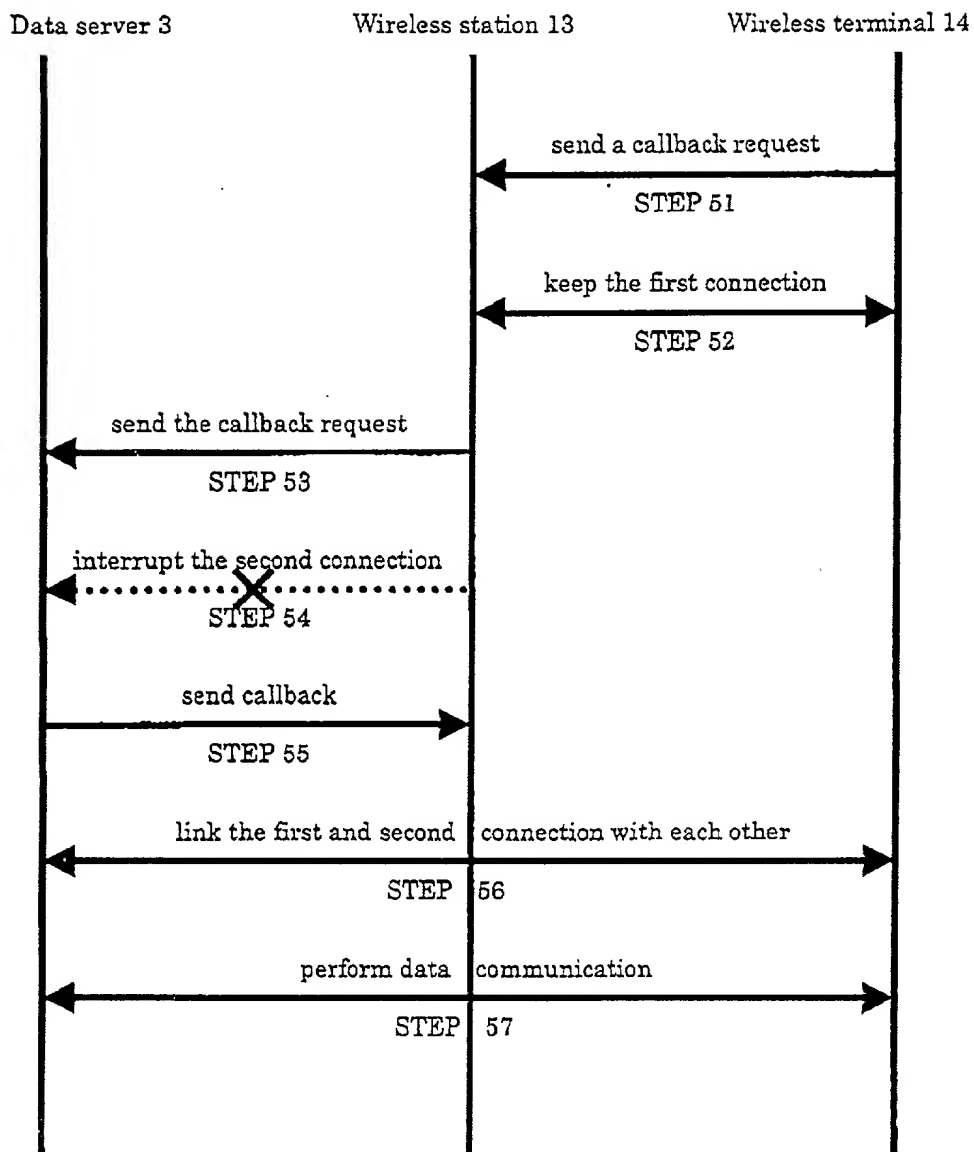


Fig. 5

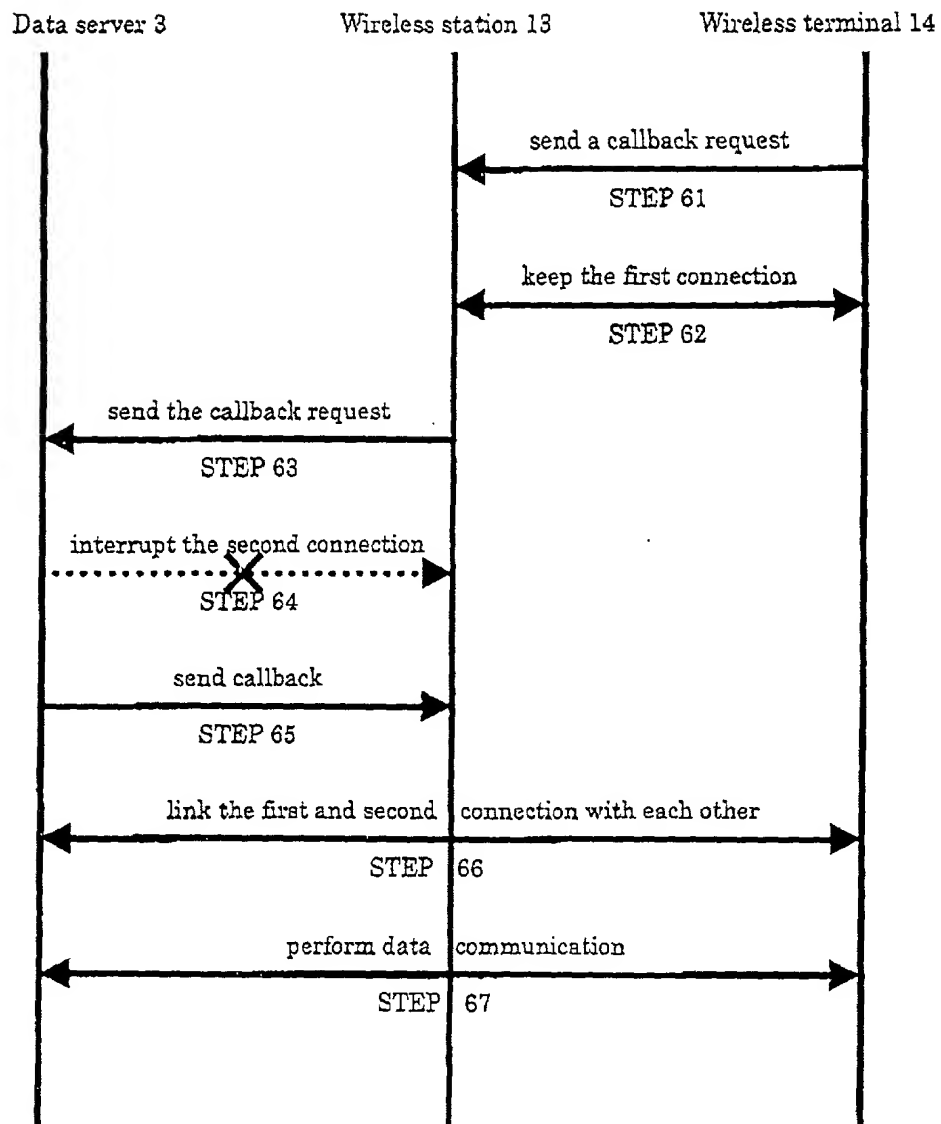


Fig. 6

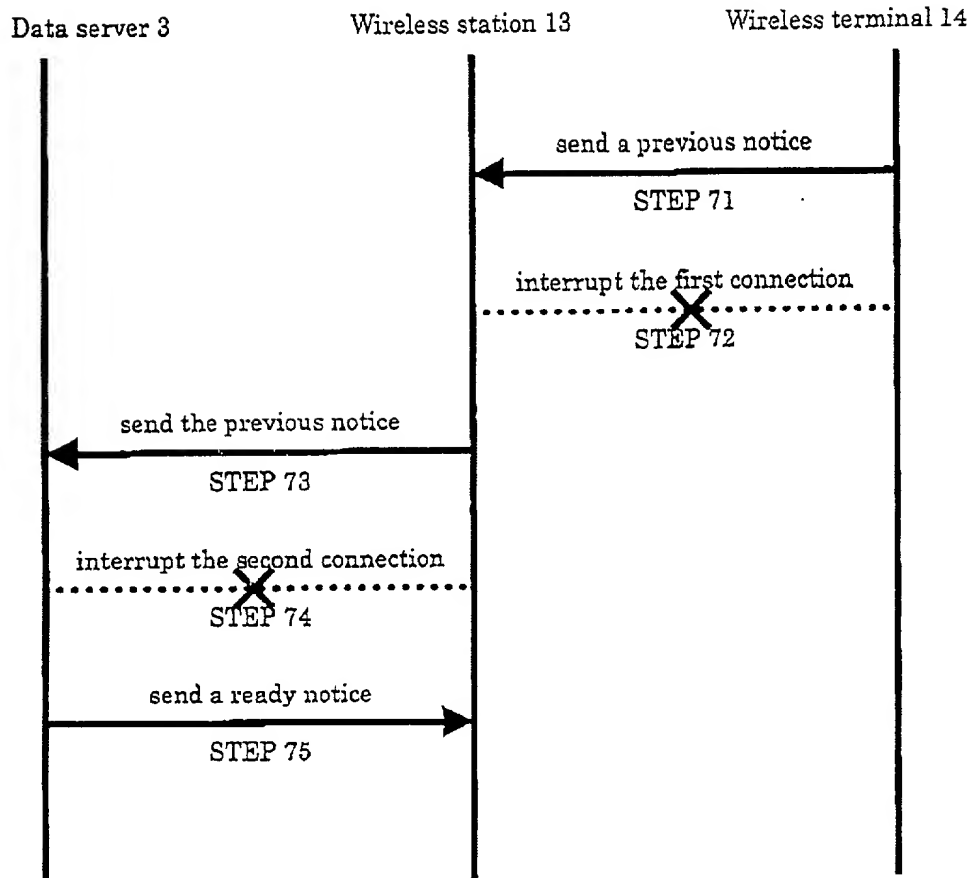


Fig. 7

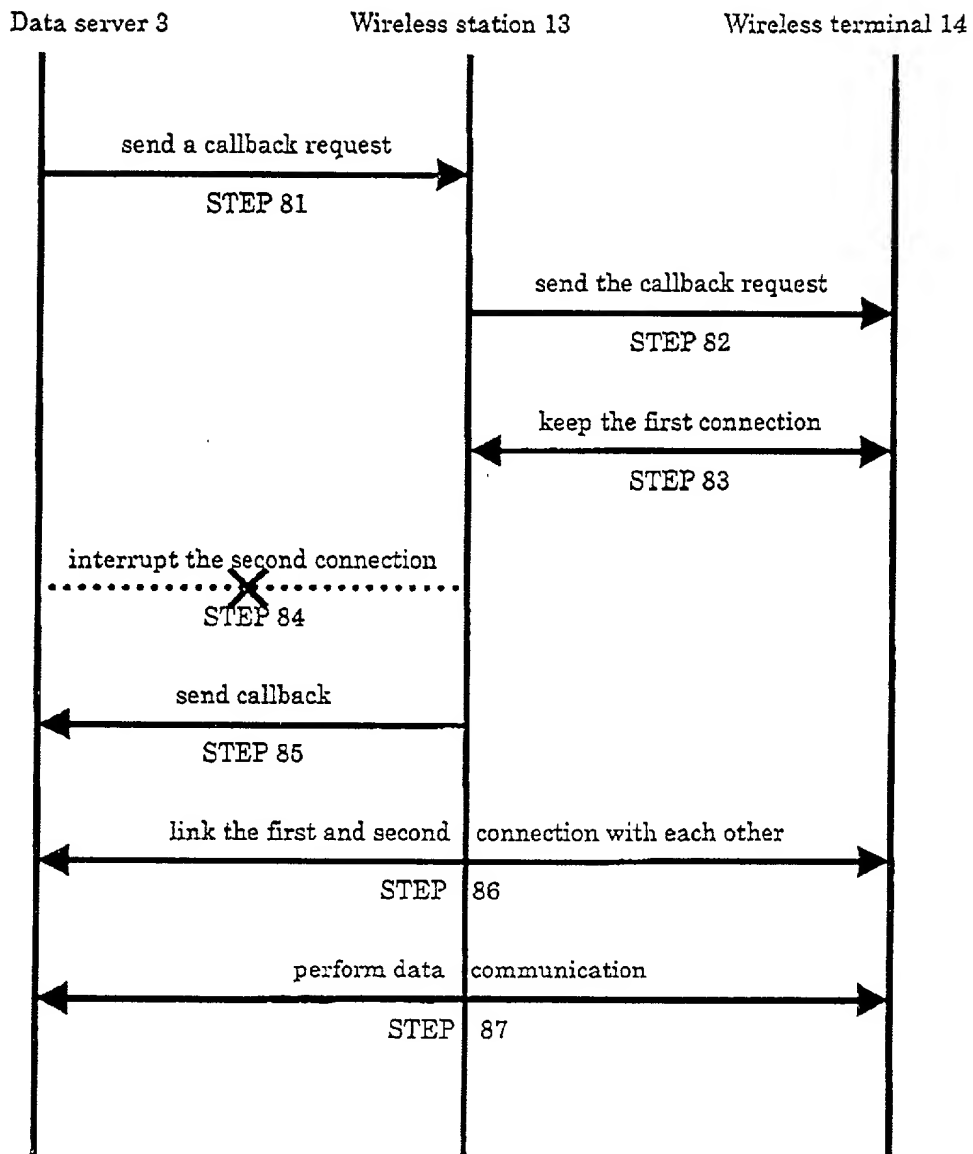


Fig. 8



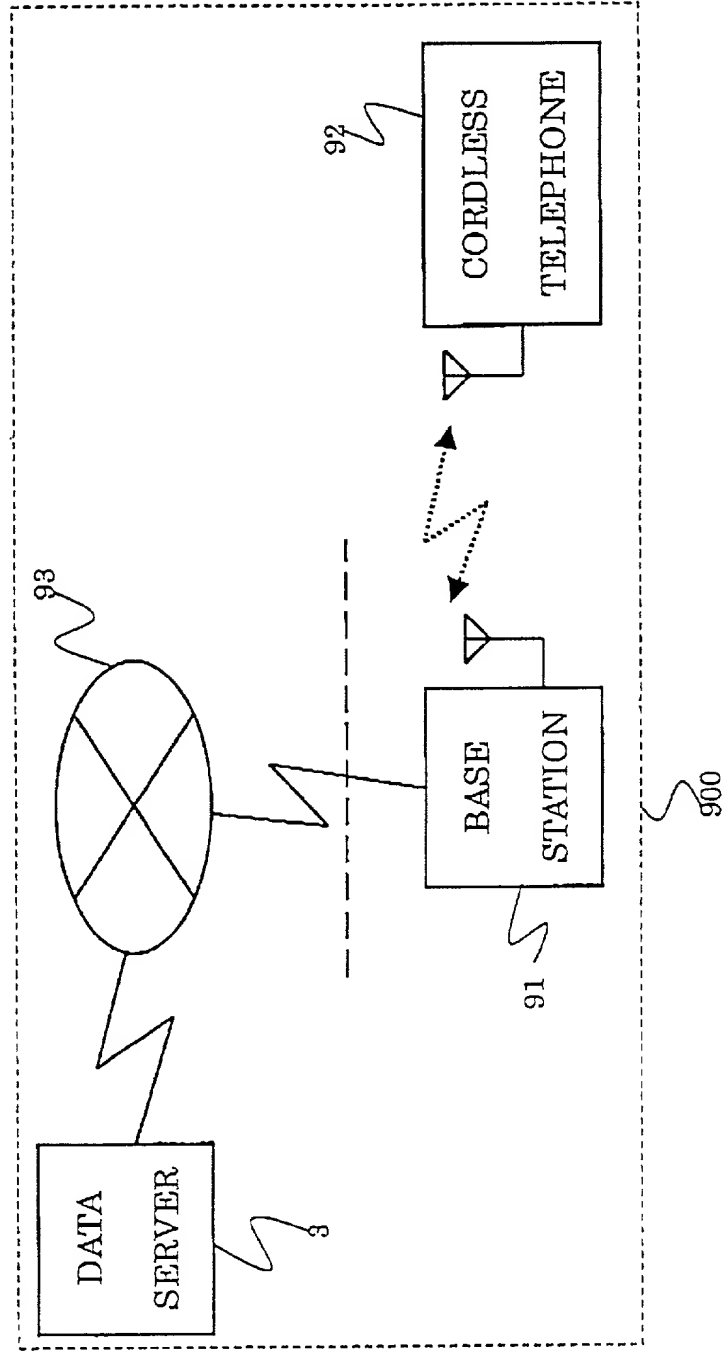


Fig. 9

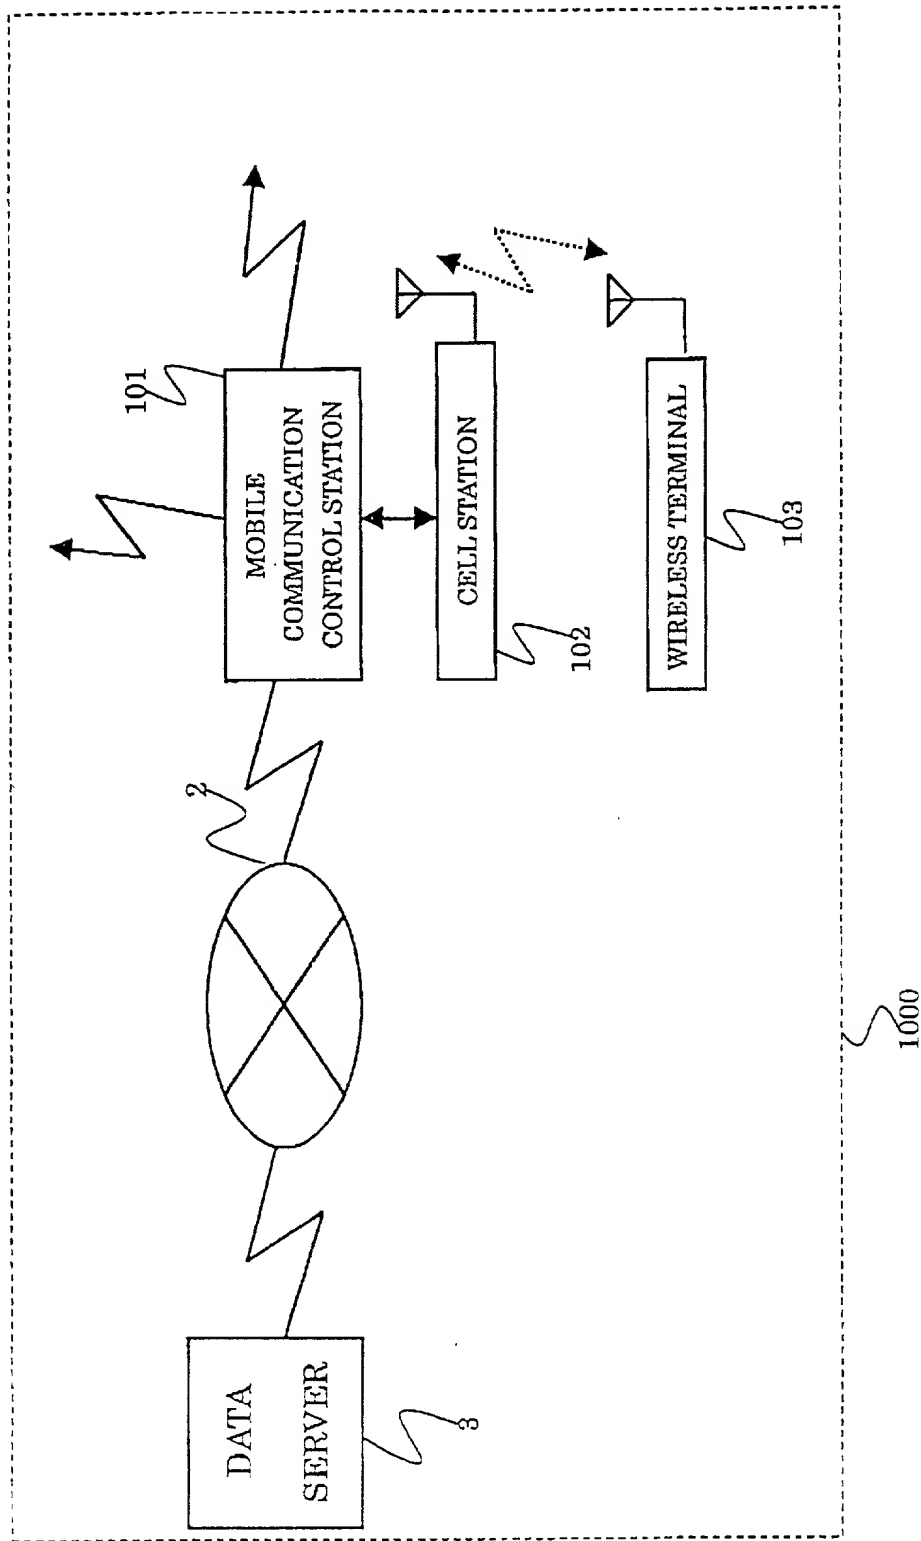


Fig. 10

11-32780

Page 1 of 3

Docket No.

# Declaration and Power of Attorney For Patent Application

## English Language Declaration

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name,

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled

METHOD AND RELAY STATION FOR CALLBACK COMMUNICATION

the specification of which

(check one)

☒ is attached hereto.

☐ was filed on \_\_\_\_\_ as United States Application No. or PCT International  
Application Number \_\_\_\_\_  
and was amended on \_\_\_\_\_

(if applicable)

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose to the United States Patent and Trademark Office all information known to me to be material to patentability as defined in Title 37, Code of Federal Regulations, Section 1.56.

I hereby claim foreign priority benefits under Title 35, United States Code, Section 119(a)-(d) or Section 365(b) of any foreign application(s) for patent or inventor's certificate, or Section 365(a) of any PCT International application which designated at least one country other than the United States, listed below and have also identified below, by checking the box, any foreign application for patent or inventor's certificate or PCT International application having a filing date before that of the application on which priority is claimed.

Prior Foreign Application(s)

Priority Not Claimed

322780/1999

Japan

12/11/1999

☐

(Number)

(Country)

(Day/Month/Year Filed)

☐

(Number)

(Country)

(Day/Month/Year Filed)

☐

(Number)

(Country)

(Day/Month/Year Filed)

I hereby claim the benefit under 35 U.S.C. Section 119(e) of any United States provisional application(s) listed below:

_____ (Application Serial No.)	_____ (Filing Date)
_____ (Application Serial No.)	_____ (Filing Date)
_____ (Application Serial No.)	_____ (Filing Date)

I hereby claim the benefit under 35 U. S. C. Section 120 of any United States application(s), or Section 365(c) of any PCT International application designating the United States, listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States or PCT International application in the manner provided by the first paragraph of 35 U.S.C. Section 112, I acknowledge the duty to disclose to the United States Patent and Trademark Office all information known to me to be material to patentability as defined in Title 37, C. F. R., Section 1.56 which became available between the filing date of the prior application and the national or PCT International filing date of this application:

_____ (Application Serial No.)	_____ (Filing Date)	_____ (Status) (patented, pending, abandoned)
_____ (Application Serial No.)	_____ (Filing Date)	_____ (Status) (patented, pending, abandoned)
_____ (Application Serial No.)	_____ (Filing Date)	_____ (Status) (patented, pending, abandoned)

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

POWER OF ATTORNEY: As a named inventor, I hereby appoint the following attorney(s) and/or agent(s) to prosecute this application and transact all business in the Patent and Trademark Office connected therewith. (list name and registration number)

Stephen D. Murphy, Reg. No.: 22,002

Paul J. Esatto, Reg. No.: 30,749

William C. Roch, Reg. No.: 24,972

Mark J. Cohen, Reg. No.: 32,211

Frank S. DiGiglio, Reg. No.: 31,346

Donald T. Black, Reg. No.: 27,999

Send Correspondence to: Paul J. Esatto, Jr.  
Scully, Scott, Murphy & Presser  
400 Garden City Plaza  
Garden City, New York 11530

Direct Telephone Calls to: (name and telephone number)

Paul J. Esatto, Jr. (516) 742-4343

Full name of sole or first inventor	CHIAKI IGARASHI	
Sole or first inventor's signature	<i>Chiaki Igarashi</i>	Date November 8, 2000
Residence	Tokyo, Japan	
Citizenship	Japanese	
Post Office Address	c/o NEC Corporation, 7-1, Shiba 5-chome, Minato-ku, Tokyo, Japan	

Full name of second inventor, if any	
Second inventor's signature	Date
Residence	
Citizenship	
Post Office Address	